

**Solicitation No. PR10750941**  
**Tent Installation for Refinishing Area**  
**Questions and Answers #1, issued June 21, 2022**


**Question 1:** Need information on the pulling force of the canvas.

**Answer:**

Canvas specifications as follows:

- PVC coated KUNILON canvas with polyester scrim in the middle
- Warp Yarn: No. 10/1 46  $\pm$ 1 inch.
- Weft Yarn: No.10/1 39  $\pm$ 1 inch.
- Thickness: 0.48 - 0.50 mm.
- Weight 520 – 560 Gm./M2
- Tensile strength: warp 136 kg. ( $\pm$ 10), weft 115 kg. ( $\pm$ 10)
- Waterproof: Over 1,000 m2
- Color: Dark blue

Additional details as following picture:

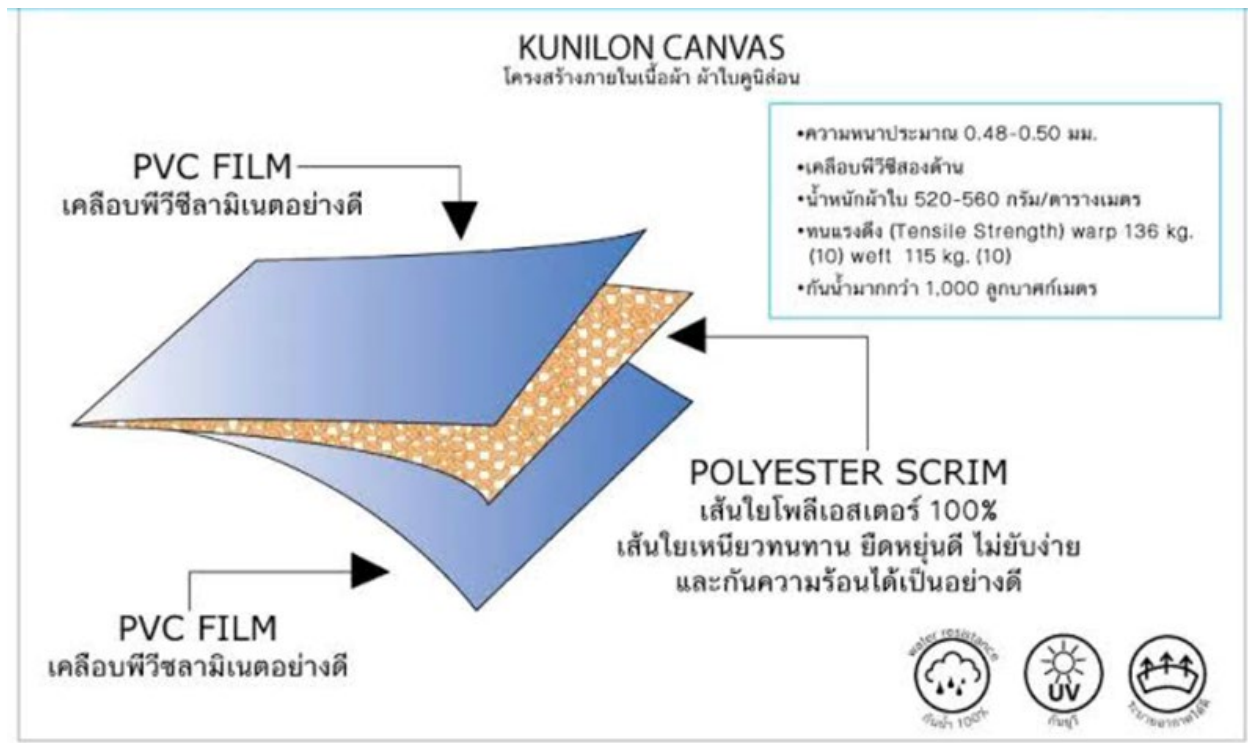



Please be additionally informed that the wind load design for below 10 meters building-height regarding BMA code/standard =50kg/m2) should be considered as well.

**Question 2:** Need information on canvas specification

**Answer:** Please find technical data provided on Question 1.

Additional note: As each bidder may have their specific products (from various countries) which have patent with proven record of durability and safety. Therefore, the bidders may propose their equivalent material specification compared with our specification, including proposed sample submitted with the price proposal for the technical evaluation.

**Question 3:** Want a picture of the event page (tent)

**Answer:** Pictures for this solicitation is available, please contact Khun Katekarn Chandsoda, Procurement Agent, email: [ChandsodaK@state.gov](mailto:ChandsodaK@state.gov) within Friday, June 24, 2022.

**Question 4:** Height of the tent legs

**Answer:** 4.5 meters (Minimum or at lowest point).

**Question 5:** We kindly request the pictures of the site area for the tent installation project in order to submit the proposal.

**Answer:** Pictures for this solicitation is available, please contact Khun Katekarn Chandsoda, Procurement Agent, email: [ChandsodaK@state.gov](mailto:ChandsodaK@state.gov) within Friday, June 24, 2022.

**Question 6:** Will the U.S. Embassy prepare a flat ground surface ready for tent setup?

**Answer:** Concrete slab supported the poles will be prepared by the Contractor.

**Question 7:** Some part of the ground is soil. It will impact the mounting pole plate of the tent. Will the embassy prepare cement ground surfaces?

**Answer:** No, the existing ground and concrete slab must be prepared by the contractor. The existing concrete slab supporting existing poles is 200 mm thk.

**Question 8:** Will the embassy remove the old fence?

**Answer:** The old fence must be removed by the Contractor.

**Question 9:** How close can we set up the tent to the old shelter? Please provide a reference picture for the distance and size.

**Answer:** Pictures for this solicitation is available, please contact Khun Katekarn Chandsoda, Procurement Agent, email: [ChandsodaK@state.gov](mailto:ChandsodaK@state.gov) within Friday, June 24, 2022.

**Question 10:** The old tent might be damaged (tearing of canvas and structure breaking for example) when we were dismantling. Will it be acceptable?

**Answer:** The existing tent must be uninstalled without damages and the current condition must be remained. Embassy's electrician will remove all electrical equipment from the existing tent. The Contractor shall carefully dismantle the existing tent including related structures.

**Question 11:** Need specific specifications of cool nylon no 5000 such as thickness tensile strength color.

**Answer:** Please find technical data provided on Question 1.

<end>